


LI50P1-Q17LM1-LU4X2-0.3-RS5/S97 Inductive Linear Position Sensor

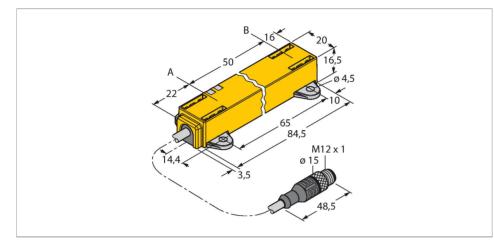


Technical data


Type

Features

- Rectangular, plastic
- Many mounting possibilities
- Positioning element P1-Li-QR14/Q17L, mounting aids M1.1-Q17L and M1.2-Q17L included in delivery
- LED indicates measuring range
- Immune to electromagnetic interference
- Extremely short blind zones
- Resolution, 12-bit
- 4-wire. 8...30 VDC
- Analog output
- Programmable measuring range
- ■0.5…4.5 V
- Cable with male end M12 x 1

Wiring diagram

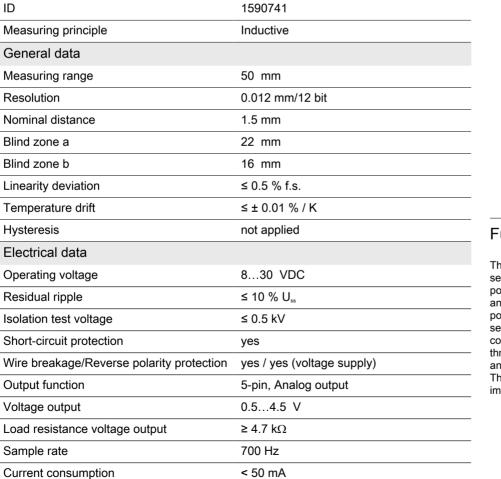



Functional principle

5 GY


The measuring principle of linear position sensors is based on RLC coupling between the positioning element and the sensor, whereby an output signal is provided proportional to the position of the positioning element. The rugged sensors are wear and tear-free, thanks to the contactless operating principle. They convince through their excellent repeatability, resolution and linearity within a broad temperature range. The innovative technology ensures a high immunity to electromagnetic DC and AC fields.

LI50P1-Q17LM1-LU4X2-0.3-RS5/S97




Technical data

Mechanical data	
Design	Profile, Q17L
Dimensions	88 x 20 x 16.5 mm
Housing material	Plastic, PC-GF10
Electrical connection	Cable with connector, M12 × 1
Cable quality	Ø 5 mm, Lif32Y32Y, TPE, 0.3 m
	Low temp. flexible and E-chain capable
Core cross-section	4 x 0.34 mm ²
Environmental conditions	
Ambient temperature	-40+70 °C
Ambient temperature Vibration resistance	-40+70 °C 55 Hz (1 mm)
Vibration resistance	55 Hz (1 mm)
Vibration resistance Shock resistance	55 Hz (1 mm) 30 g (11 ms)
Vibration resistance Shock resistance Protection class	55 Hz (1 mm) 30 g (11 ms) IP67 138 years acc. to SN 29500 (Ed. 99) 40
Vibration resistance Shock resistance Protection class MTTF	55 Hz (1 mm) 30 g (11 ms) IP67 138 years acc. to SN 29500 (Ed. 99) 40 °C



Mounting instructions

Mounting instructions/Description

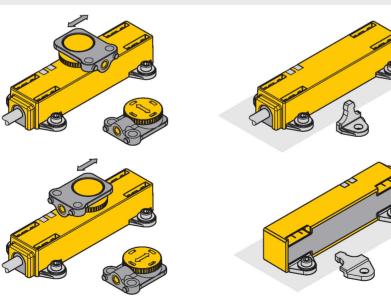

Extensive mounting accessories provide various options for installation.
The positioning element can be mounted offset by 90° degrees. This provides highest mounting flexibility. The linear position sensor can also be mounted offset by 90° degrees with the two provided screw joints. The measuring principle of RLC coupling makes the sensor immune to magnetized metal splinters and other interference fields.
LED indicates status:
Green:
Sensor is supplied correctly
LED indicates measuring range Green:
Positioning element is in the measuring range Green flashing:
Positioning element is outside the coverage
Teaching
The start and end point of the measuring range are set by pressing the button at the teach adapter. Moreover there is the possibility to invert the course of the output curve.

invert the course of the output curve.




Bridge pin 5 and pin 1 for 10 s (UB) = factory setting

Bridge pin 5 and pin 3 for 10 s (GND) = factory setting inverted


Bridge pin 5 and pin 3 for 2 s (GND) = sets start value of measuring range Bridge pin 5 and pin 1 for 2 s (UB) = sets end value of measuring range

Accessories

P1-LI-QR14/Q17L



M1.2-Q17L




1590724


Floating positioning element for linear position sensors LI-QR14 and LI-Q17L; transverse and longitudinal mounting possible; the nominal distance to the sensor is 1.5 mm; pairing with the linear position sensor at a distance of up to 3 mm or a misalignment tolerance of up to 3 mm

1590750

Mounting foot for linear position sensors LI-Q17L; material: aluminum; 3 pcs. per bag



RMT-Q17L



1590749

Mounting bracket for linear position sensors LI-Q17L; material: aluminum; 3 pcs. per bag

1590755

Removal tool for mounting elements for linear position sensors LI-Q17L

3|3