CURRENT TRANSFORMERS

METERING CLASS CURRENT TRANSFORMER *MODELS* 125, 126

FEATURES

600V CLASS

- Manufactured to meet requirements of UL 1244 and revisions.
- Model 125 Terminals are Brass Studs No. 8-32 UNC
- Model 126 Terminals are Brass Studs No. 10-32 UNC (Each with flat washer, lockwasher and regular nut.)

APPLICATIONS

- For use with AGW series and AGH series Watt and Watt/Watt Hour Transducers.
- Ideal for use with Ammeters, Set Point Relays, Watt, Var, Current Transducers and Watt Hour Meters.

SPECIFICATIONS

Frequency..... 50 to 400Hz
Insulation Class ..... 0.6kV 10kV BIL Full Wave
Weight .....Model 125..... 3 lbs.
Model 126..... 5.5 lbs.
Mounting Brackets.....Model 125..... P/N 0221B00231
Model 126..... P/N 0221B01529
Bus Bar Mounting Kit...Model 125..... P/N 0221A26076

Manufactured to meet the requirements of ANSI/IEEE C57.13

c US E238872 245941

RoHS

MADE IN U.S.A.

APPLICATION AND ORDERING DATA

CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS ACCURACY AT 60Hz					SECONDARY WINDING RESISTANCE (Ω @ 75°C)	CONTINUOUS THERMAL RATING FACTOR	
		B0.1	B0.2	B0.5	B0.9	B1.8		@30°C	@55°C
125-102	1000:5	0.3	0.3	0.3	0.6	1.2	0.187	1.5	1.33
125-122	1200:5	0.3	0.3	0.3	0.6	1.2	0.223	1.5	1.33
125-152	1500:5	0.3	0.3	0.3	0.3	0.6	0.285	1.5	1.33
125-162	1600:5	0.3	0.3	0.3	0.3	0.6	0.304	1.5	1.33
125-202	2000:5	0.3	0.3	0.3	0.3	0.6	0.280	1.5	1.0
125-252	2500:5	0.3	0.3	0.3	0.3	0.6	0.351	1.33	1.0
125-302	3000:5	0.3	0.3	0.3	0.3	0.6	0.421	1.33	1.0
125-352	3500:5	0.3	0.3	0.3	0.3	0.3	0.491	1.33	1.0
125-402	4000:5	0.3	0.3	0.3	0.3	0.3	0.696	1.0	0.8
126-152	1500:5	0.3	0.3	0.3	0.3	0.3	0.434	1.5	1.0
126-162	1600:5	0.3	0.3	0.3	0.3	0.3	0.462	1.5	1.0
126-202	2000:5	0.3	0.3	0.3	0.3	0.3	0.578	1.33	1.0
126-252	2500:5	0.3	0.3	0.3	0.3	0.3	0.904	1.0	0.8
126-302	3000:5	0.3	0.3	0.3	0.3	0.3	0.722	1.33	1.0
126-322	3200:5	0.3	0.3	0.3	0.3	0.3	0.770	1.33	1.0
126-352	3500:5	0.3	0.3	0.3	0.3	0.3	0.842	1.0	0.8
126-402	4000:5	0.3	0.3	0.3	0.3	0.3	0.962	1.0	0.8
126-502	5000:5	0.3	0.3	0.3	0.3	0.3	1.203	1.0	0.8

MODEL 125 DIMENSIONS

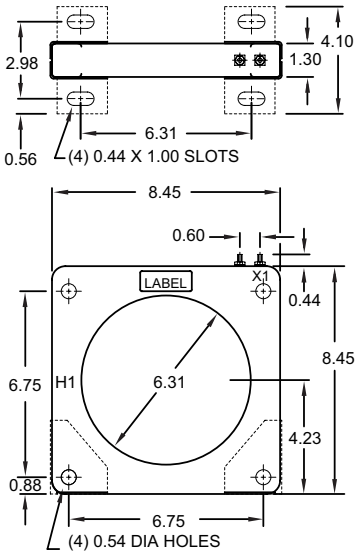

MODEL 126 DIMENSIONS

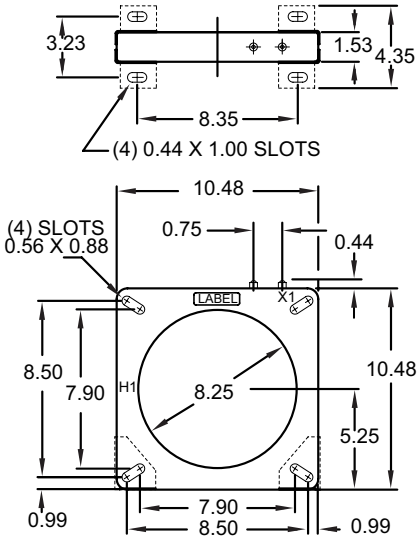

All Dimensions In Inches

FLEX-CORE®
Div. Morlan & Associates, Inc.
4970 Scioto Darby Rd. Hilliard, Ohio 43026

WWW.FLEX-CORE.COM
sales@flex-core.com

PHONE (614) 889-6152
TECH. ASSISTANCE (614) 876-8308
FAX # (614) 876-8538